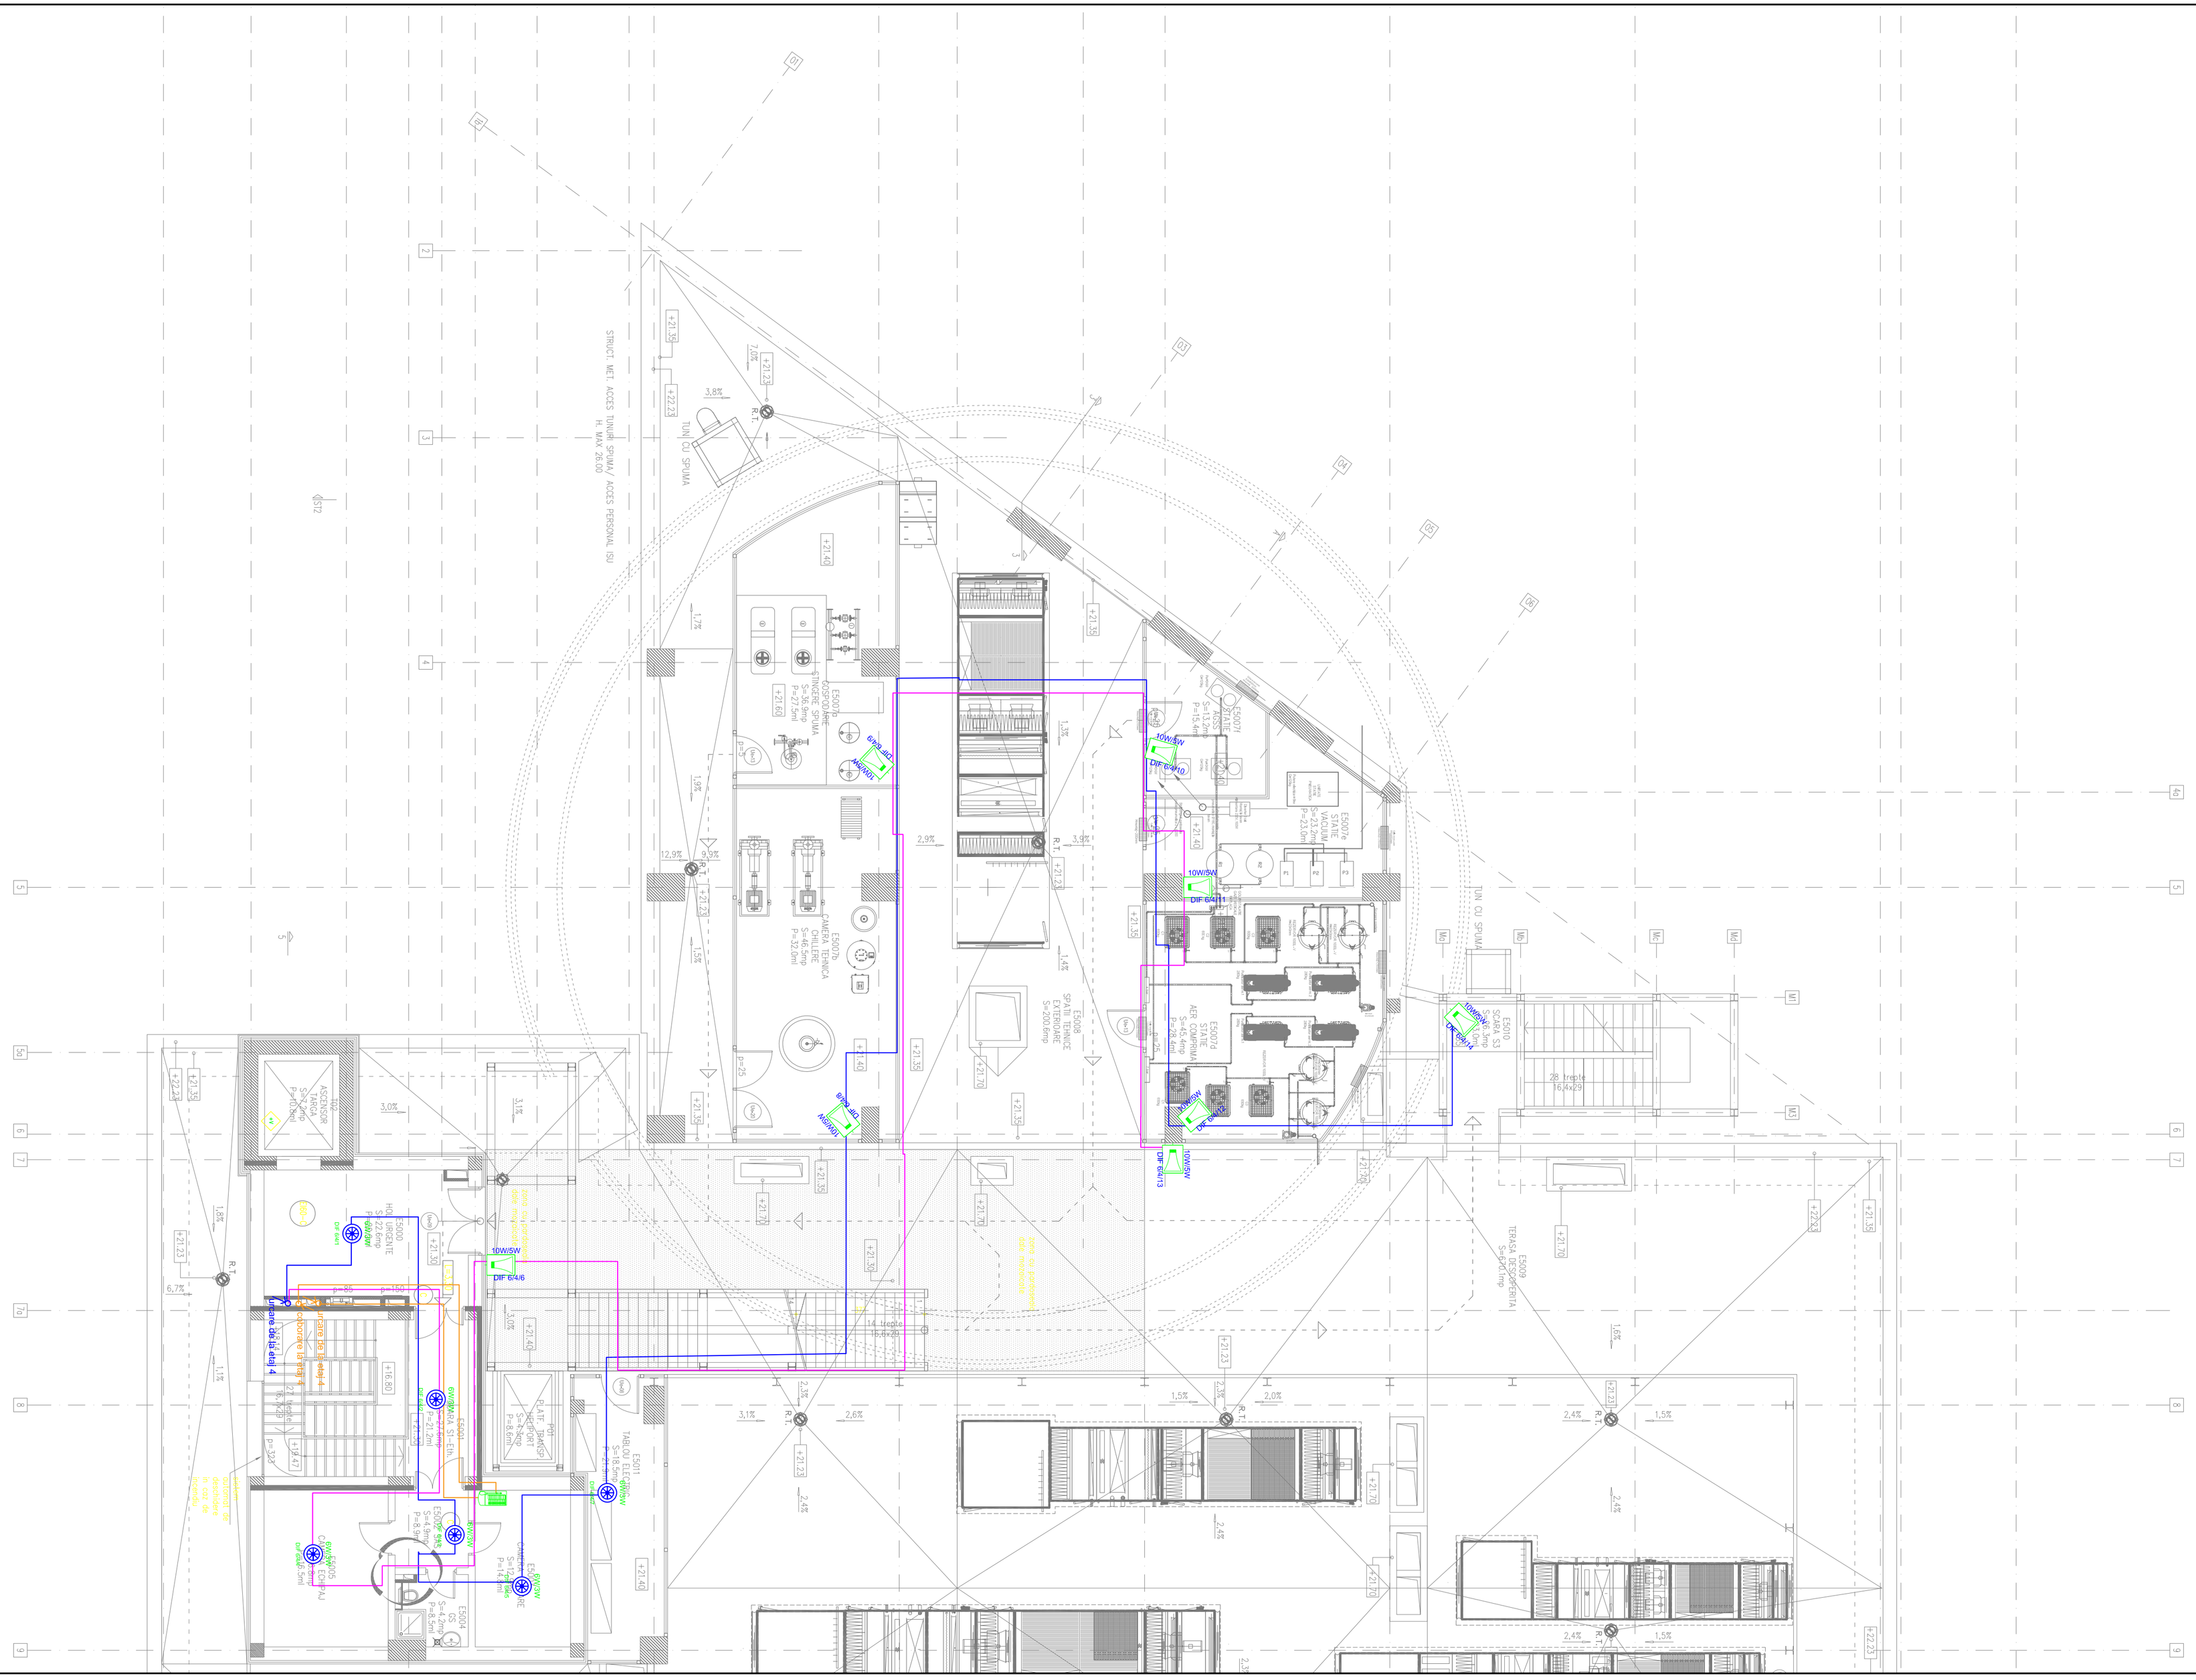

LEGENDA
LEGEND

CENTRALA SONORIZARE

Centrala sonorizare 500 W,6 zone ,cu iesire dubla pe fiecare zona ,display 4.3",consola pompier inclusa si amplificator de rezerva, 100 Vca/24Vcc cu acumulatori 2x18 Ah inclusi,certificata EN-54

Sound system 500 W central panel, 6 zones, with double output on each zone, 4.3 "display, fire console included and spare amplifier, 100 VAC / 24Vdc with 2x18 Ah batteries included, EN-54 certified

CENTRALA SONORIZARE

Centrala sonorizare 500 W,4 zone ,cu iesire dubla pe fiecare zona ,display 4.3",consola pompier inclusa si amplificator de rezerva, 100 Vca/24Vcc cu acumulatori 2x18 Ah inclusi,certificata EN-54

Sound system 500 W central panel, 4 zones, with double output on each zone, 4.3 "display, fire console included and spare amplifier, 100 VAC / 24Vdc with 2x18 Ah batteries included, EN-54 certified

6W/3W 6W/3W 6W/3W 6W/3W 6W/3W
DIF xyz DIF xyz DIF xyz DIF xyz DIF xyz

DIFUZOR DE PLAFON
1,5/3/6 W conectat la treapta de putere 3W

CEILING SPEAKER
1.5 / 3/6 W connected to 3W power stage

10W/5W DIF000

DIFUZOR PROIECTOR, de exterior, 1.25/2.5/5/10 W conectat la treapta de putere 5W

PROJECTOR SPEAKER, outdoor, 1.25 / 2.5 / 5/10 W connected to 5W power stage

CONSOLA DIGITALA MONITORIZATA CU MICROFON
DIGITAL MONITORED CONSOLE WITH MICROPHONE

CONSOLA POMPIERI DIGITALA MONITORIZATA CU MICROFON
DIGITAL FIRE CONSOLE MONITORED WITH MICROPHONE

CABLU REZISTENT LA FOC E90/FE180 2X1,5 mm
FIRE RESISTANT CABLE E90 / FE180 2X1.5 mm

CABLU JE-H(St)H 4x2x0.8mm²
JE-H (St) H CABLE 4x2x0.8mm²

CABLU CAT5 SFTP
CAT5 SFTP CABLE

DIFx/y/z

Numar centrala sonorizare
Sound system panel number

Numar difuzor
Speaker number

Numar zona
Zone number

CATEGORIA DE IMPORTANTA	- A	(cnf. H.G.R.NR.766-1997)
CLASA DE IMPORTANTA	- I	(cnf. Normativ P100-06)
GRAD DE REZISTENTA LA FOC	- I - II	(cnf. Normativ P118-1999)
RISC DE INCENDIU	- MIC	(cnf. Normativ P118-1999)

VERIFICATOR / EXPERT	NUME	SEMNATURA	CERINTELE

REFERAT de verificare/ RAPORT de expertiza tehnica
Nr. - Data: -

TRACTEBEL ENGINEERING S.A.
Str. Antoine de Saint Exupery nr. 20-22, sector 1, 013775 Bucuresti - ROMANIA
tel: (+40-21) 203-61-111; fax: (+40-21) 224-22-01
www.tractebel.ro; www.tractebel-engineering.be
e-publication.gtsi.com

ATELIER OF ARCHITECTURE CHRISTIAN TANASCAUX

Proiect : Interconectarea cladirilor existente si constructie noua in incinta Spitalului Clinic Judetean de Urgente « Pius Branzeu » Timisoara, in vederea reorganizarii circuitelor medicale pentru departamentele: UPU, Chirurgie, ATI si Centru de Mail Arsi.

Pr. Nr: P.013049

Locatie : Bulevardul Liviu Rebreanu 156, Timisoara 300723
Beneficiar : Consiliul Judetean Timis
Investitor : Ministerul Sanatatii - Romania

SPECIFICATIE	NUME	SEMNATURA
SEF PROIECT	Arh.Christian TANASCAUX	
MANAGER PROIECT	Ing. Liviu POPA-BELEGANTE	
VERIFICAT	Ing. Aurelian NITA	
DESENAT	Ing. Florin TANASE	
PROIECTAT	Ing. Florin TANASE	

Scara: 1:100
Format: A0+
Data: FEBRUARIE 2021

Denumire desen:
PLAN SONORIZARE ETAJ 5
5TH floor sound system plan

Faza: PT+DE
Rev. 01
Pagina 1/1

Nr desen: P.013049_D8_IECS046