



LEGENDA
LEGEND:



Ceas Master Clock pentru aplicatii medicale cu receptor GPS inclusiv antenna

Master Clock for medical applications with GPS receiver including antenna



Ceas Master Clock cu receptor GPS inclusiv antenna
Master Clock with GPS receiver including antenna

12:00

Ceas digital medical Slave (ore, minute, secunde ,cromometru+telecomanda) fata simpla ,montaj pe perete sau tavan, unghi citire 120°, distanta citire 0-20 metri
Slave digital medical clock (hours, minutes, seconds chromometer + remote control) single front, wall or ceiling mounting, reading angle 120°, reading distance 0-20 meters

12:00

Ceas digital Slave (ore, minute) fata dubla ,montaj pe perete sau tavan, unghi citire 120°, distanta citire 0-40 metri
Slave digital clock (hours, minutes) double face, wall or ceiling mounting, reading angle 120°, reading distance 0-40 meters



Ceas analogic Slave (ore, minute) fata simpla ,montaj pe perete sau tavan, distanta citire 0-20 metri
Slave analog clock (hours, minutes) single face, wall or ceiling mounting, reading distance 0-20 meters



Amplificator de impuls
Impulse amplifier



Legatura LAN
LAN connection






Cablu UTP LSZH 4x0.5 mmp pentru circuit ceas medical
UTP LSZH 4x0.5 mmp cable for power supply medical clock circuit



Cablu UTP LSZH 4x0.5 mmp pentru circuit ceas
UTP LSZH 4x0.5 mmp cable for power supply clock circuit



Cablu NZXH 3x2.5 mmp pentru circuit alimentare ceasuri digitale
NZXH 3x2.5 mmp cable for power supply digital clocks

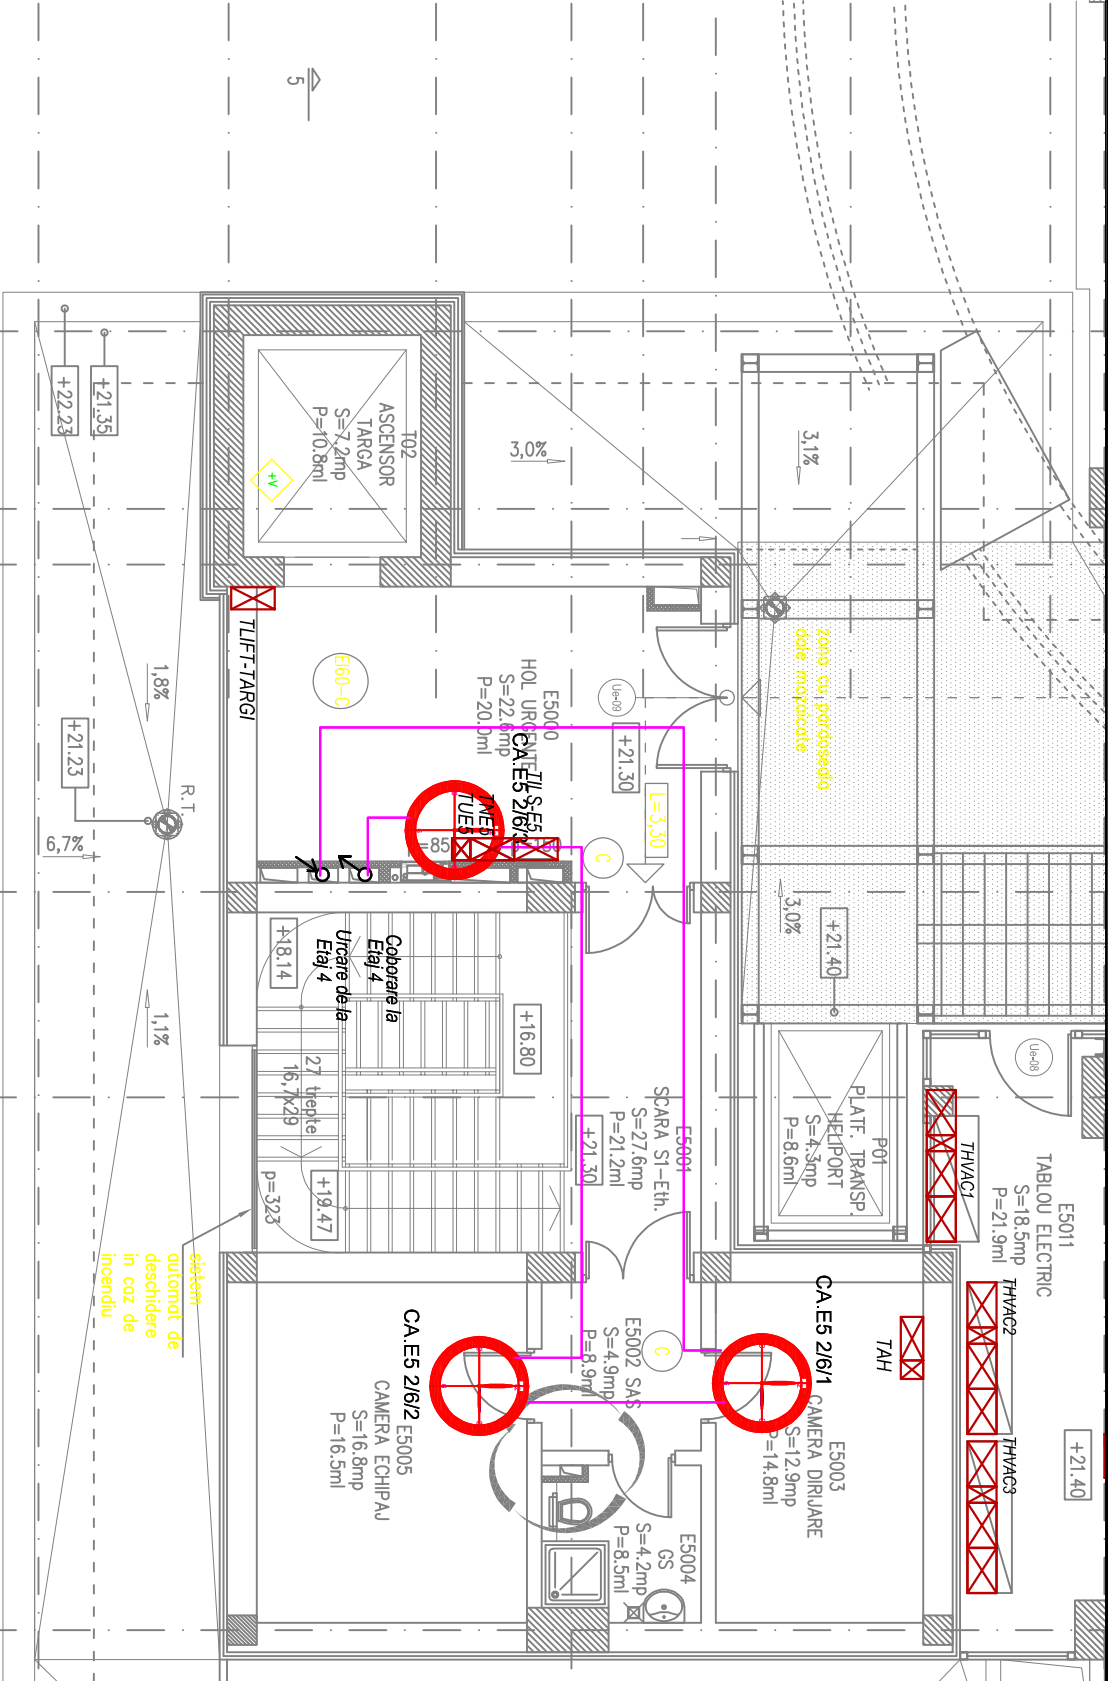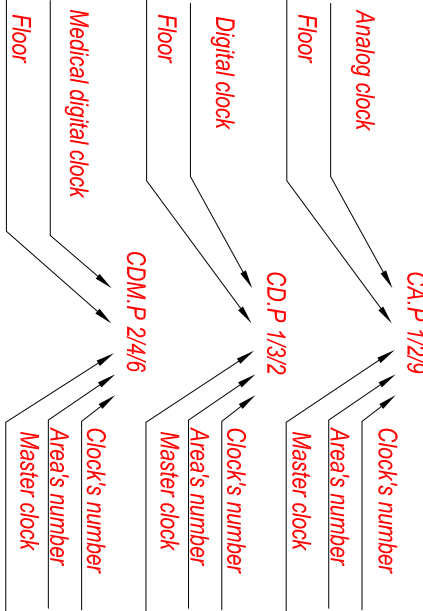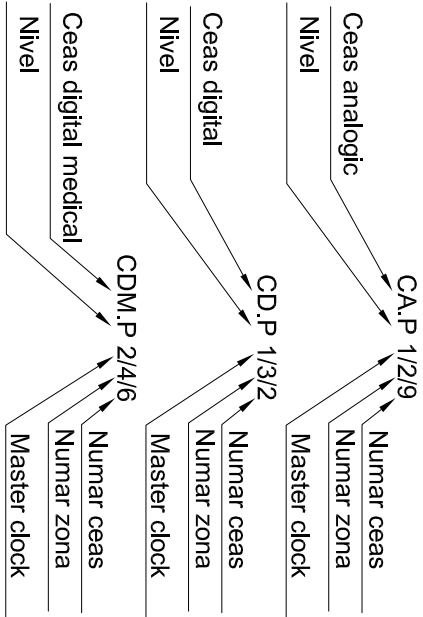

CATEGORIA DE IMPORTANTA - A (cnf. H.G.R.NR.766-1997)
CLASA DE IMPORTANTA - I (cnf. Normativ P100-06)
GRAD DE REZISTENTA LA FOC - I - II (cnf. Normativ P118-1999)
RISC DE INCENDIU - MIC (cnf. Normativ P118-1999)

VERIFICATOR / EXPERT	NUME	SEMANTURA	CERINTELE	REFERAT de verificare/ RAPORT de experienta tehnica Nr. - Data:	Pt. Nr.: P.013049
TRACTEBEL	engie	ATELIER OF ARCHITECTURE CHRISTIAN TANASCAUX		Proiect: Interconectarea cladilor existente si constructie noua in Incinta Spitalului Clinic Județean de Urgență « Pius Brnzău » Timișoara, în vederea reorganizării circulației medicale pentru departamentele: UPU, Chirurgie, ATI și Centru de Mari Afli.	Rev. 01
SPECIFICATIE	NUME	SEMANTURA	Scara: 1:100	Locatie Beneficiar : Consiliul Județean Timiș Investitor : Ministerul Sănătății - Romania	Faza: PT+DE
SEF PROIECT	Ath Christian TANASCAUX		Format: A3	Denumire desen: Plan ceasoficare etaj 5 5Th floor clocks network plan	
MANAGER PROIECT	Ing. Liviu POPA-BELEAGANTE				
VERIFICAT	Ing. Aurelian NITA		Data:		
DESENAV	Ing. Floin Tanase		FEBRUARIE 2021		
PROIECTAT	Ing. Floin Tanase			Nr. desen: P.013049_D0_IECS038	Pagina 1/1