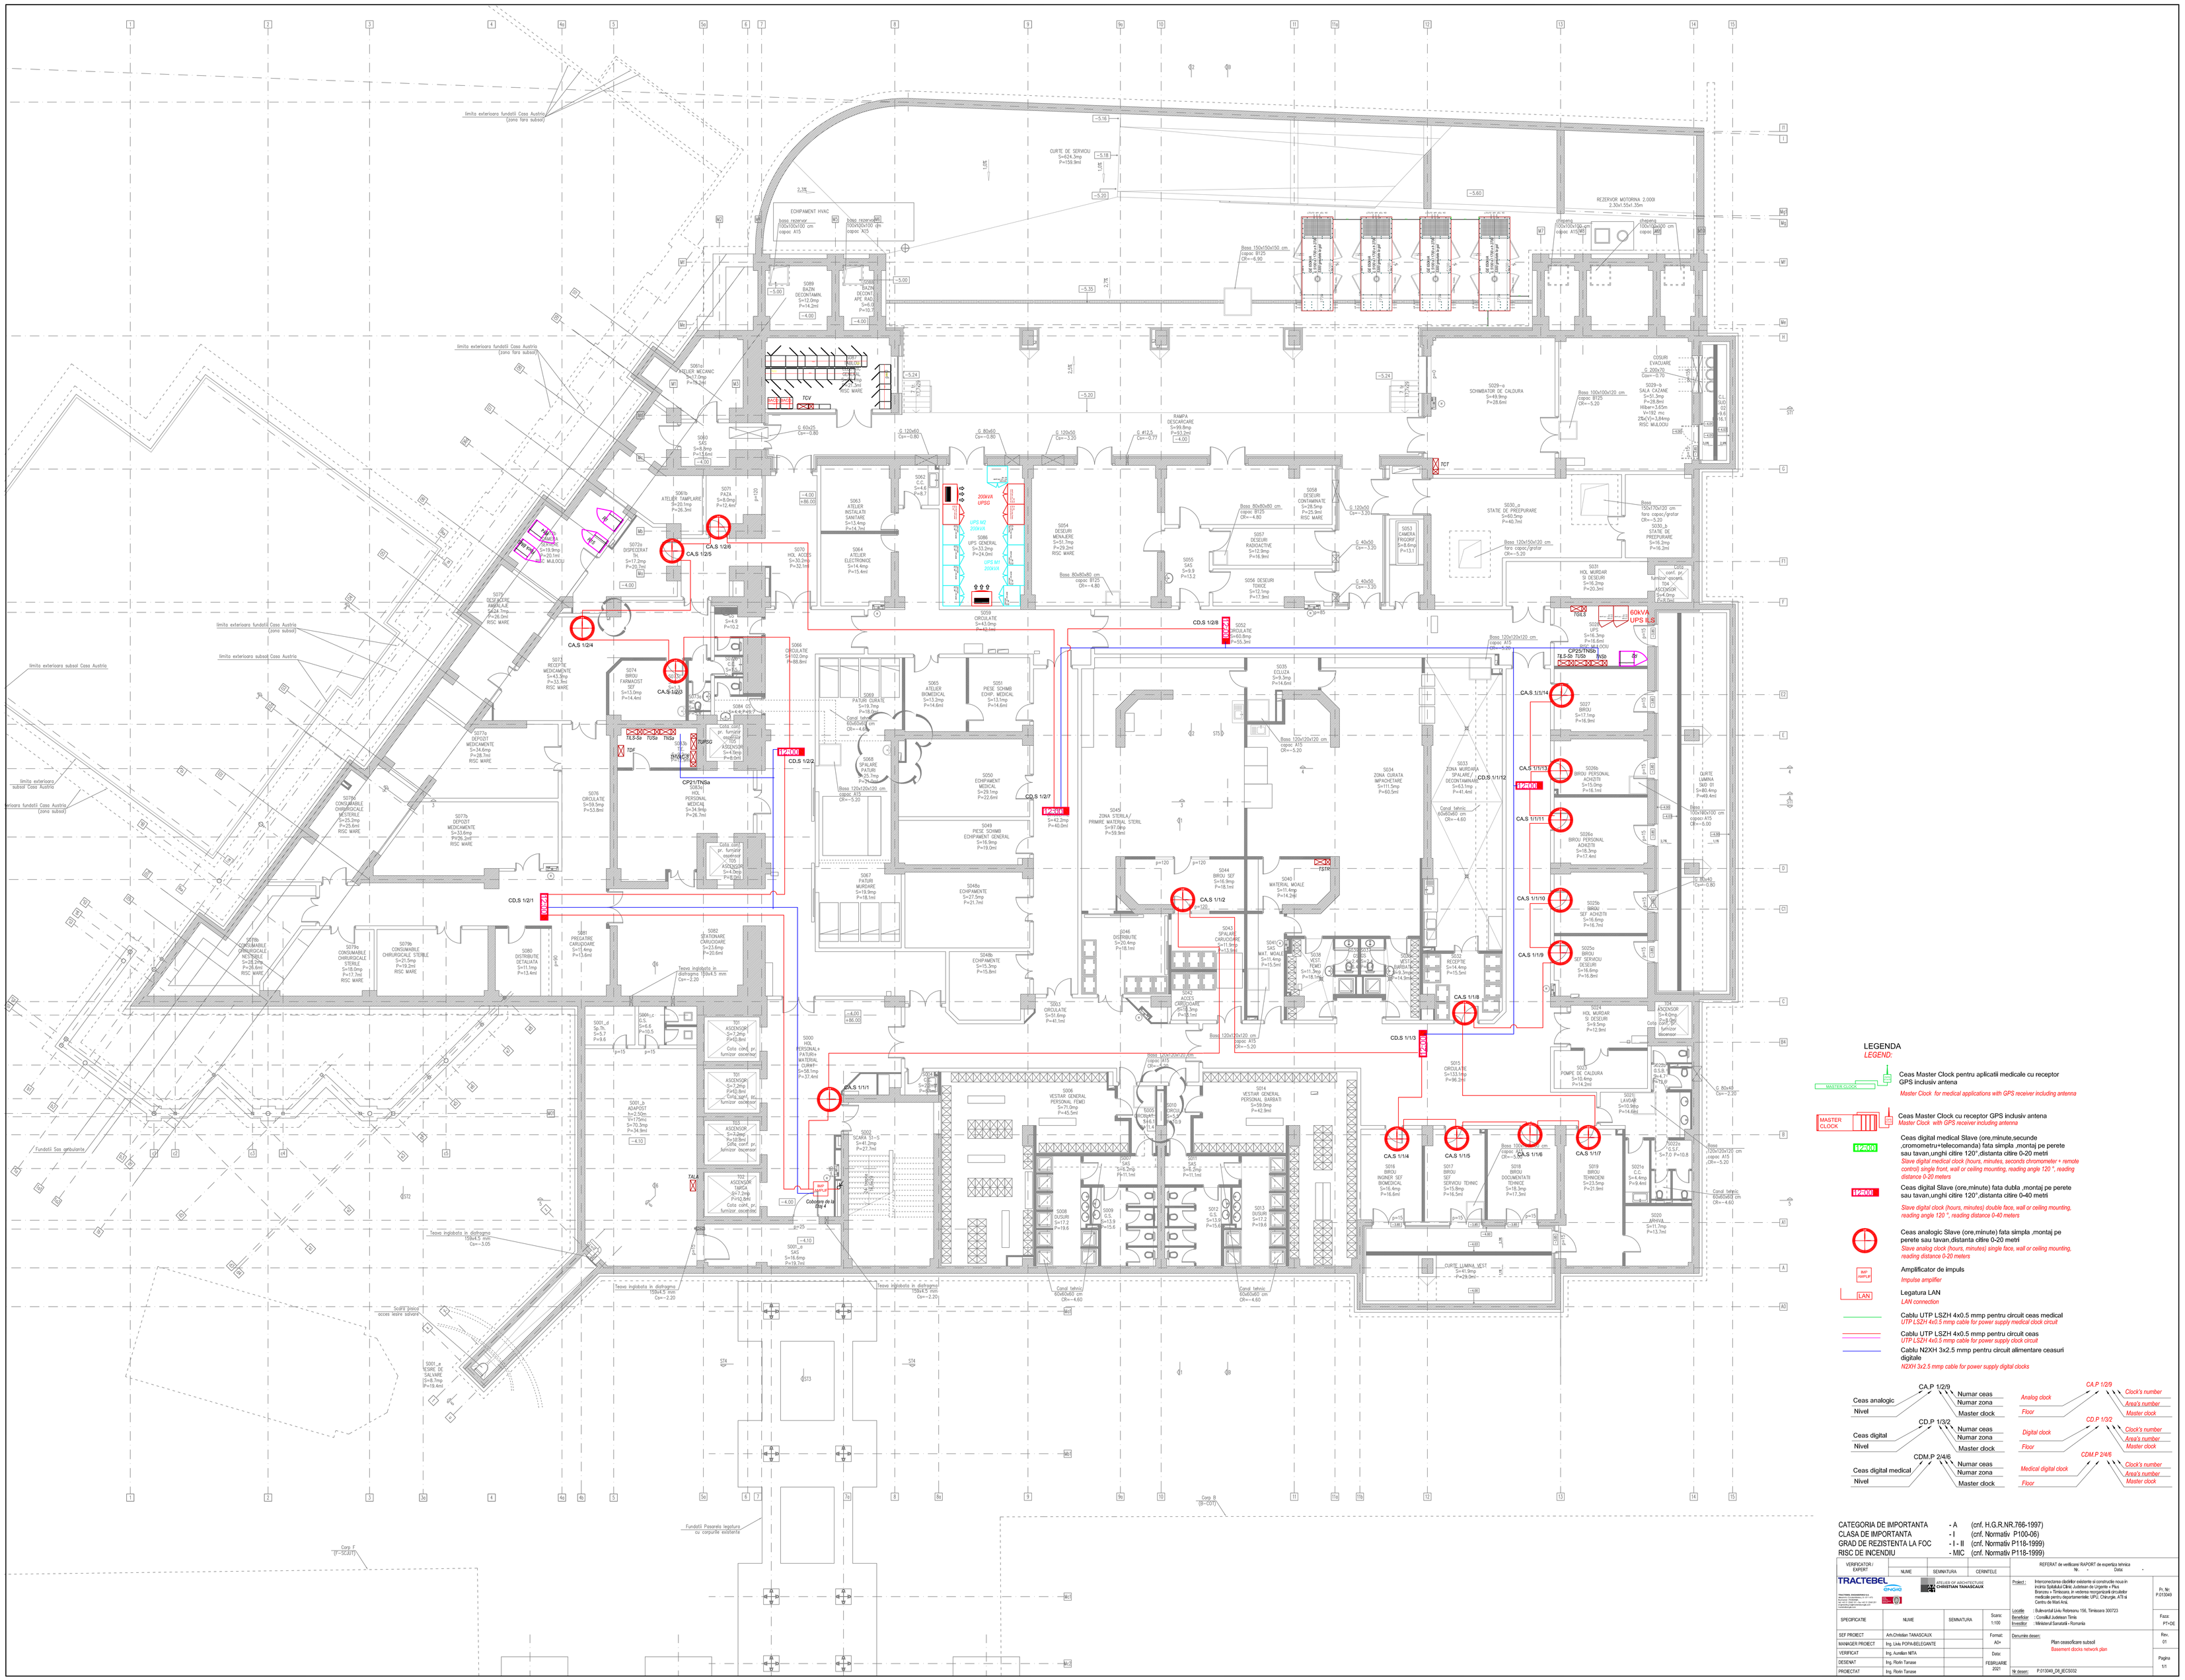
LEGENDA
LEGEND:
Ceas Master Clock pentru aplicatii medicale cu receptor GPS inclusiv antena
Master Clock for medical applications with GPS receiver including antenna
Ceas Master Clock cu receptor GPS inclusiv antena
Master Clock with GPS receiver including antenna
Ceas digital medical Slave (ore,minute,secunde ,cronometru+telecomanda) fata simpla ,montaj pe perete sau tavan,unghi citire 120°,distanta citire 0-20 metri
Slave digital medical clock (hours, minutes, seconds chronometer + remote control) single front, wall or ceiling mounting, reading angle 120 °, reading distance 0-20 meters
Ceas digital Slave (ore,minute) fata dubla ,montaj pe perete sau tavan,unghi citire 120°,distanta citire 0-40 metri
Slave digital clock (hours, minutes) double face, wall or ceiling mounting, reading angle 120 °, reading distance 0-40 meters
Ceas analogic Slave (ore,minute) fata simpla ,montaj pe perete sau tavan,distanta citire 0-20 metri
Slave analog clock (hours, minutes) single face, wall or ceiling mounting, reading distance 0-20 meters
Amplificator de impuls
Impulse amplifier
Legatura LAN
LAN connection
Cablu UTP LSZH 4x0.5 mmp pentru circuit ceas medical
UTP LSZH 4x0.5 mmp cable for power supply medical clock circuit
Cablu UTP LSZH 4x0.5 mmp pentru circuit ceas
UTP LSZH 4x0.5 mmp cable for power supply clock circuit
Cablu N2XH 3x2.5 mmp pentru circuit alimentare ceasuri digitale
N2XH 3x2.5 mmp cable for power supply digital clocks
CA.P 1/2/9
Ceas analogic
Nivel
Numar ceas
Numar zona
Master clock
Analog clock
Floor
Clock's number
Area's number
Master clock
CD.P 1/3/2
Ceas digital
Nivel
Digital clock
CDM.P 2/4/6
Ceas digital medical
Medical digital clock
CATEGORIA DE IMPORTANTA - A (cnf. H.G.R.NR.766-1997)
CLASA DE IMPORTANTA - I (cnf. Normativ P100-06)
GRAD DE REZISTENTA LA FOC - I - II (cnf. Normativ P118-1999)
RISC DE INCENDIU - MIC (cnf. Normativ P118-1999)
VERIFICATORI EXPERT:
NUME
SEMNATURA
CERINTELE
REFERAT de verificare RAPORT de expertiza tehnica
Nr: -
Data: -
TRACTEBEL
ARCHITECTURE CHRISTIAN TANASCAUX
Proiect: Intervenotrestimare date/date existente si constructie noua in incinta Spitalului Clinic Judetean de Urgente « Pius Branzeu » Timisoara, in vederea reorganizarii circuitelor medicale pentru,departamentele: UPU, Chirurgie, ATI si Centru de Mari Arsi.
Pr. Nr: P.013049
Locatie: Bulevardul Liviu Rebreanu 156, Timisoara 300723
Beneficiar: Consiliul Judetean Timis
Investitor: Ministerul Sanatatii - Romania
SPECIFICATE
NUME
SEMNATURA
Scara: 1:100
Format: A0+
Data: FEBRUARIE 2025
SEF PROIECT: Arh.Christian TANASCAUX
MANAGER PROJECT: Ing. Lia.POPA-BELEGANTE
VERIFICAT: Ing. Aurelian NITA
DESENAT: Ing. Florin Tarcaie
PROIECTAT: Ing. Florin Tarcaie
Denumire desen:
Plan ceasoficare subsol
Basement docks network plan
Rev.: 01
Pagina: 1/1
Nr desen: P.013049_DE_IECS002