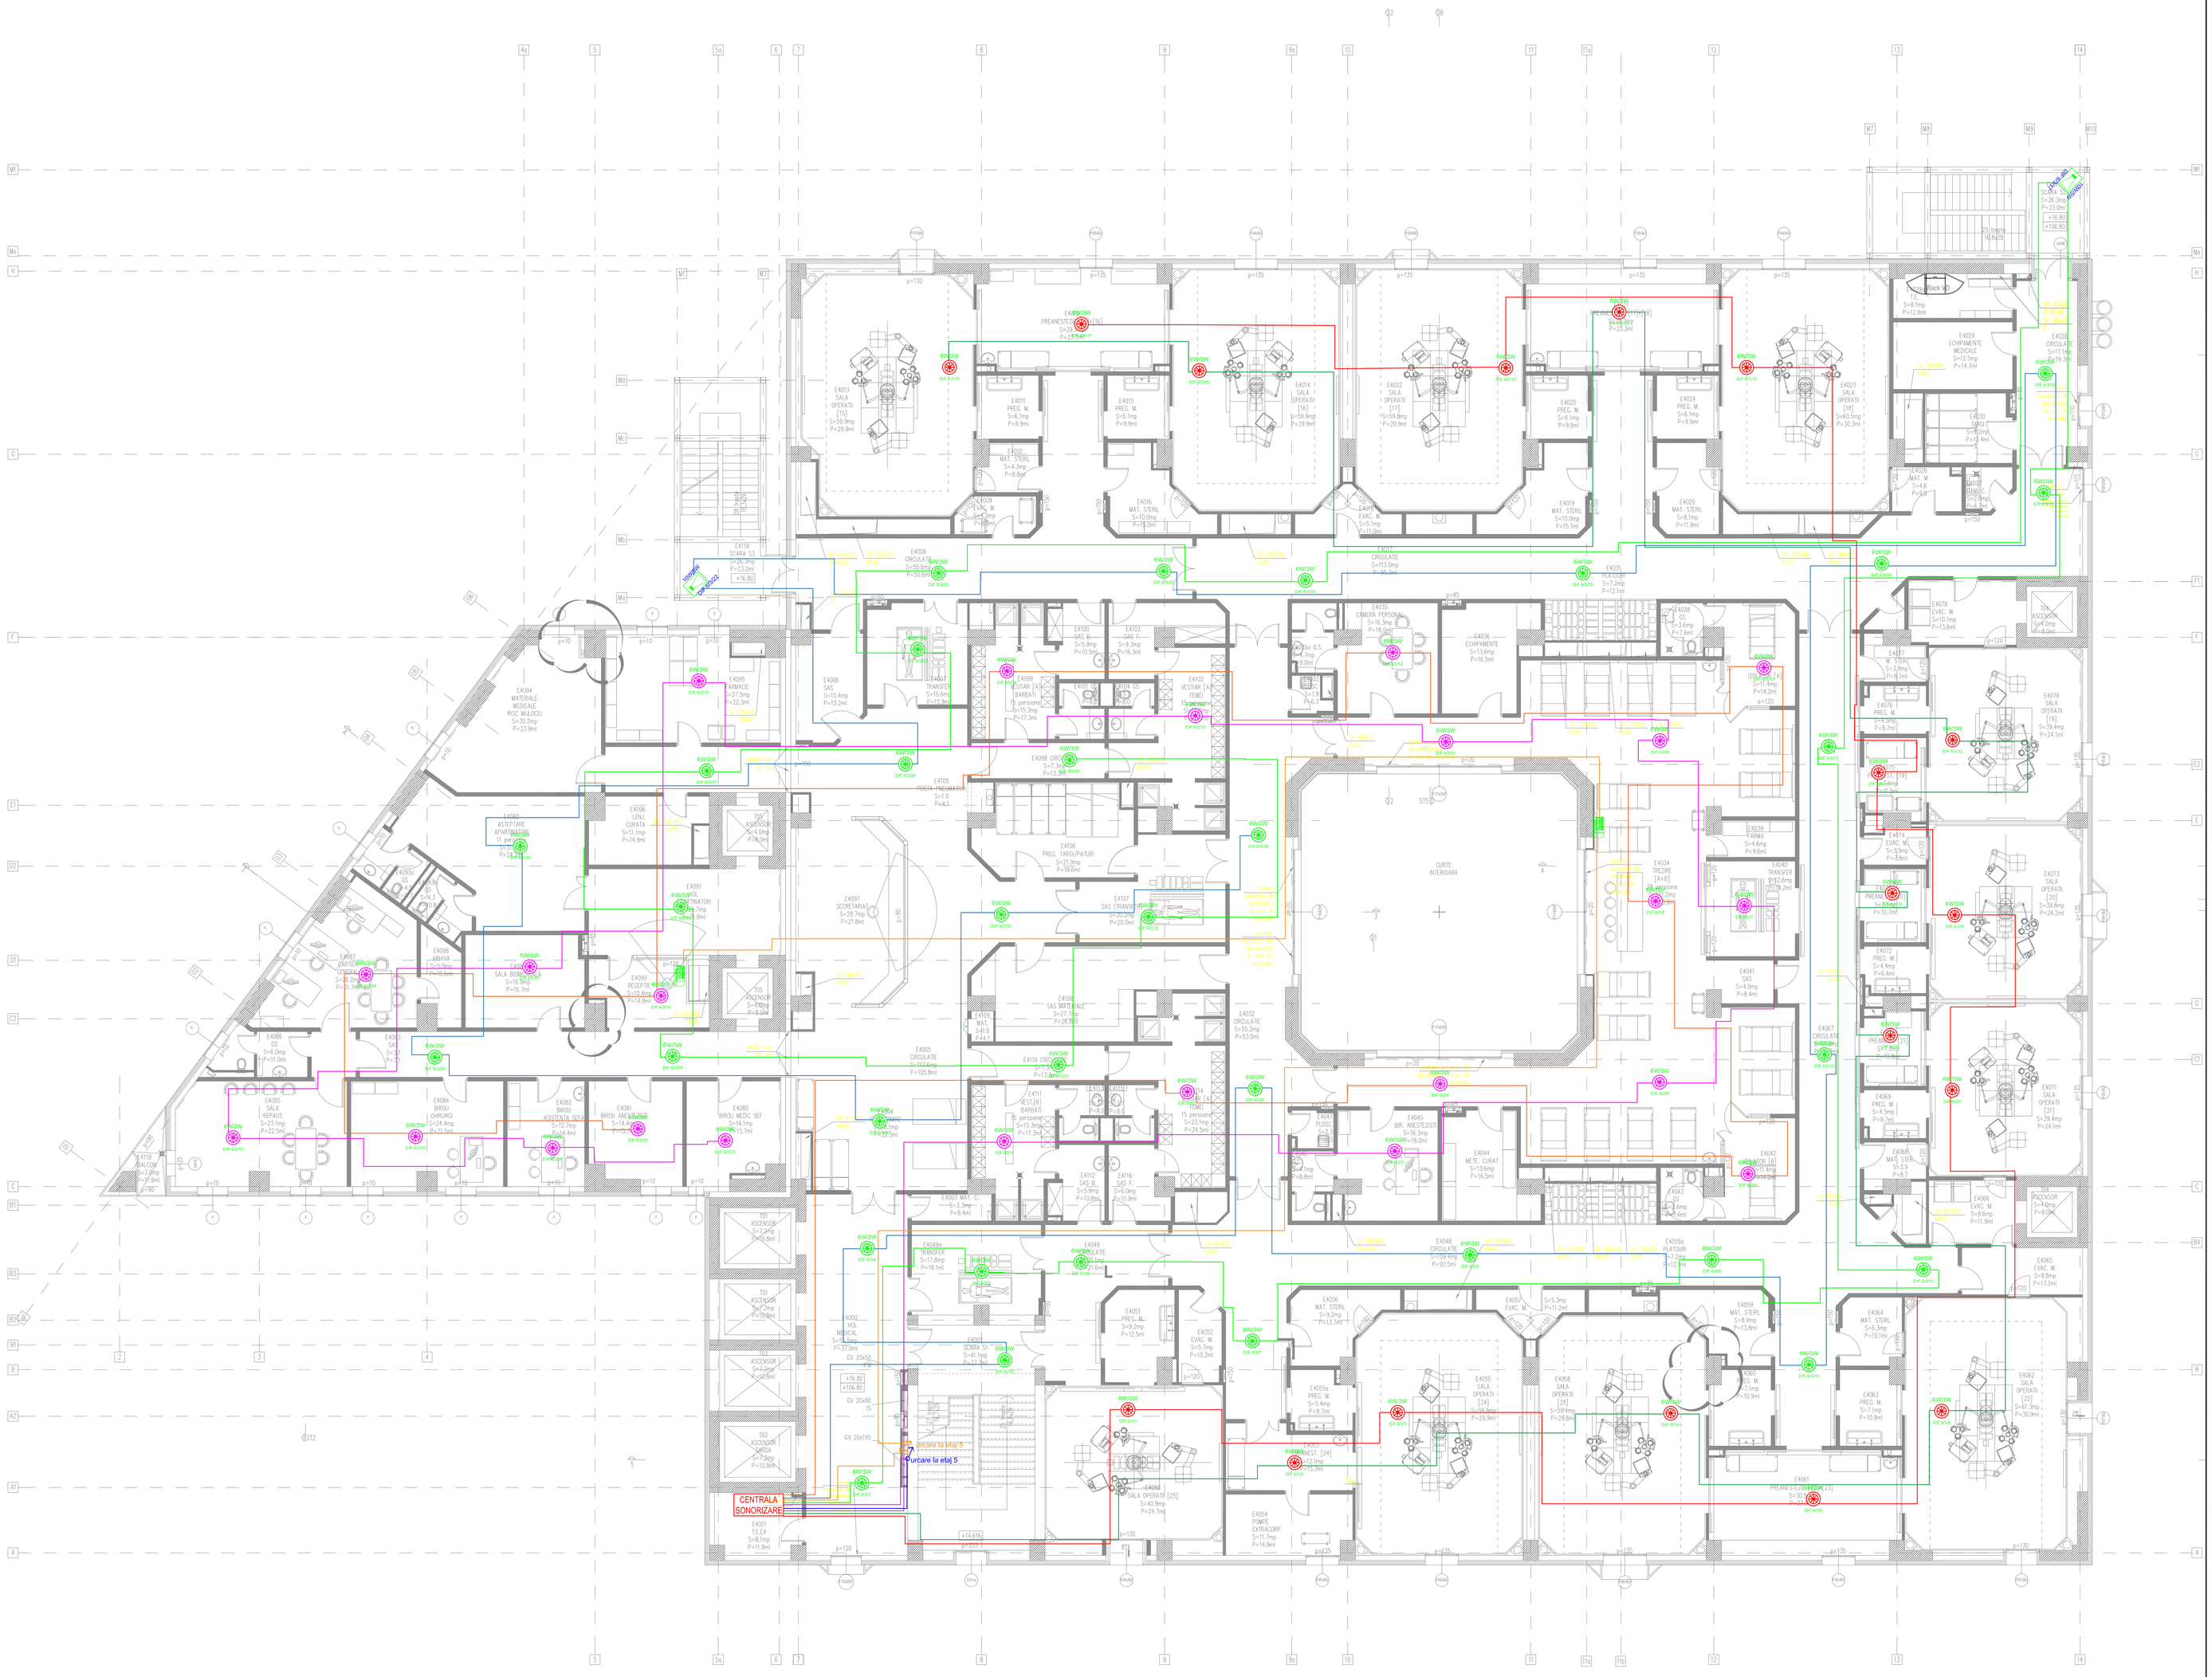


## LEGENDA
## LEGEND

CENTRALA SONORIZARE

Centrala sonorizare 500 W.6 zone ,cu iesire dubla pe fiecare zona ,display 4.3",consola pompier inclusa si amplificator de rezerva, 100 Vca/24Vcc cu acumulatori 2x18 Ah inclusi,certificata EN-54

Sound system 500 W central panel, 6 zones, with double output on each zone, 4.3 "display, fire console included and spare amplifier, 100 VAC / 24Vdc with 2x18 Ah batteries included, EN-54 certified

CENTRALA SONORIZARE

Centrala sonorizare 500 W.4 zone ,cu iesire dubla pe fiecare zona ,display 4.3",consola pompier inclusa si amplificator de rezerva, 100 Vca/24Vcc cu acumulatori 2x18 Ah inclusi,certificata EN-54

Sound system 500 W central panel, 4 zones, with double output on each zone, 4.3 "display, fire console included and spare amplifier, 100 VAC / 24Vdc with 2x18 Ah batteries included, EN-54 certified

CENTRALA SONORIZARE

Centrala sonorizare 500 W.4 zone ,cu iesire dubla pe fiecare zona ,display 4.3",consola pompier inclusa si amplificator de rezerva, 100 Vca/24Vcc cu acumulatori 2x18 Ah inclusi,certificata EN-54

Sound system 500 W central panel, 4 zones, with double output on each zone, 4.3 "display, fire console included and spare amplifier, 100 VAC / 24Vdc with 2x18 Ah batteries included, EN-54 certified

6W/3W DIF xyz — DIFUZOR DE PLAFON
1,5/3/6 W conectat la treapta de putere 3W
CEILING SPEAKER
1.5 / 3/6 W connected to 3W power stage

10W/5W DIF000 — DIFUZOR PROIECTOR, de exterior, 1,25/2,5/5/10 W conectat la treapta de putere 5W
PROJECTOR SPEAKER, outdoor, 1.25 / 2.5 / 5/10 W connected to 5W power stage

CONSOLA DIGITALA MONITORIZATA CU MICROFON
DIGITAL MONITORED CONSOLE WITH MICROPHONE

CONSOLA POMPIERI DIGITALA MONITORIZATA CU MICROF
DIGITAL FIRE CONSOLE MONITORED WITH MICROPHONE

CABLU REZISTENT LA FOC E90/FE180 2X1,5 mm
FIRE RESISTANT CABLE E90 / FE180 2X1.5 mm

CABLU JE-H(St)H 4x2x0,8mm²
JE-H (St) H CABLE 4x2x0.8mm²

CABLU CAT5 SFTP
CAT5 SFTP CABLE

DIFx/y/z
- Numar centrala sonorizare — Sound system panel number
- Numar difuzor — Speaker number
- Numar zona — Zone number

| | | |
|---|---|---|
| CATEGORIA DE IMPORTANTA | - A | (cnf. H.G.R.NR.766-1997) |
| CLASA DE IMPORTANTA | - I | (cnf. Normativ P100-06) |
| GRAD DE REZISTENTA LA FOC | - I - II | (cnf. Normativ P118-1999) |
| RISC DE INCENDIU | - MIC | (cnf. Normativ P118-1999) |

| VERIFICATOR / EXPERT | NUME | SEMNATURA | CERINTELE | REFERAT de verificare/ RAPORT de expertiza tehnica Nr. - Data: - |
|---|---|---|---|---|

TRACTEBEL ENGINEERING S.A.
Str. Antoni Mureseanu nr. 1-3, 01-011 Bucuresti, ROMANIA
tel: (40) 21 2040 101; fax: (40) 21 2040 201
www.tractebel-engineering.ro; www.engineering.be
mail@tractebel.ro

ATELIER DE ARHITECTURA CHRISTIAN TANASCAUX

Proiect : Interconectarea cladirilor existente si construirile noua in incinta Spitalului Clinic Judetean de Urgente « Pius Branzeu » Timisoara, in vederea reorganizarii circuitelor medicale pentru departamentele: UPU, Chirurgie, ATI si Centru de Mari Arsi.

Pr. Nr: P.013049

Locatie : Bulevardul Liviu Rebreanu 156, Timisoara 300723
Beneficiar : Consiliul Judetean Timis
Investitor : Ministerul Sanatatii - Romania

Faza: PT+DE

| SPECIFICATIE | NUME | SEMNATURA | Scara: 1:100 |
|---|---|---|---|
| SEF PROIECT | Arh.Christian TANASCAUX | | Format: A0+ |
| MANAGER PROIECT | Ing. Liviu POPA-BELEGANTE | | |
| VERIFICAT | Ing. Aurelian NITA | | Data: FEBRUARIE 2021 |
| DESENAT | Ing. Florin TANASE | | |
| PROIECTAT | Ing. Florin TANASE | | |

Denumire desen: PLAN SONORIZARE ETAJ 4
4TH floor sound system plan

Rev. 01

Pagina 1/1

Nr desen: P.013049_D8_IECS045