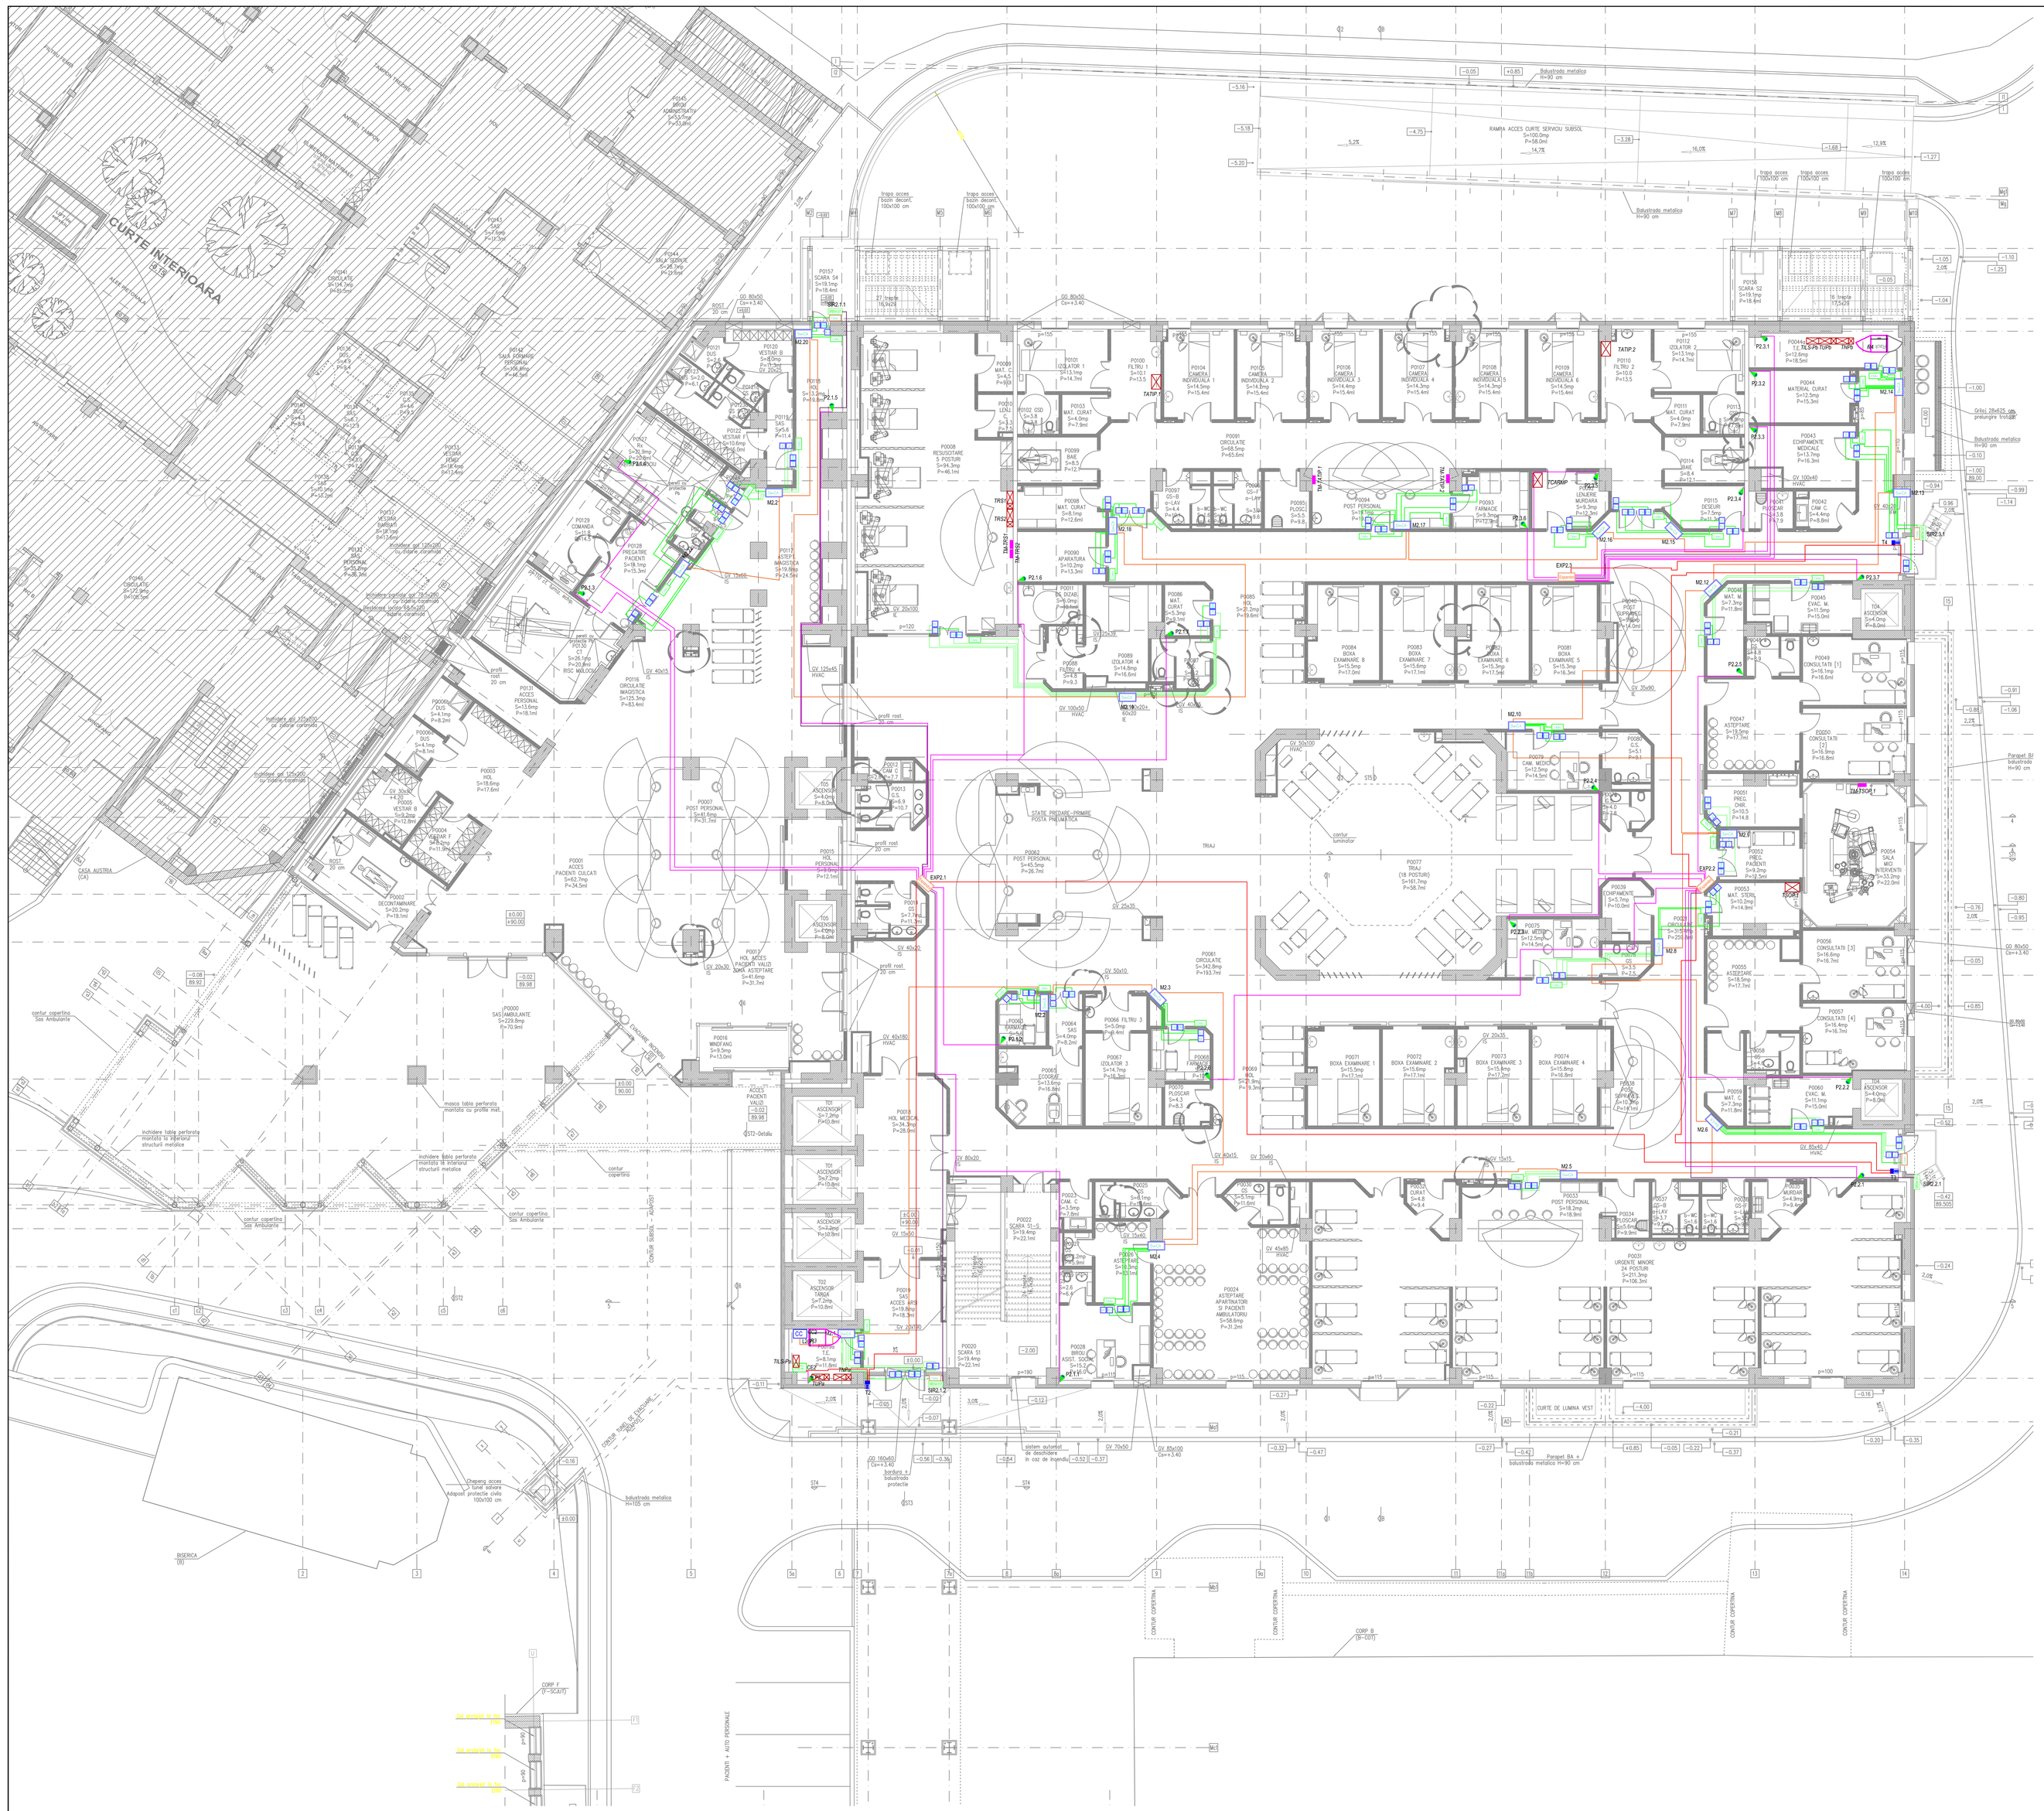

Cititor de proximitate, 125 kHz, 100mA/12VcC, de interior
Proximity reader, 125 kHz, 100mA/12VcC, for indoor

Cititor de proximitate, 125 kHz, 100mA/12VcC, de exterior
Proximity reader, 125 kHz, 100mA/12VcC, for outdoor

Buton deschidere din urgență, cu retinere a reverului cu cheie
Emergency opening button, with restraint and return with key

Buton deschidere usa
Door open button

Cablu pt comunicatie RS 485
RS485 communication cable

Cablu alarma 4x0.5
4x0.5 alarm cable

Ansamblu control acces format din 4 cablaje: 1 cablu cu 6 conductoare pentru cititor de cartuse; 1 cablu cu 2 conductoare pentru contactul magnetic; 1 cablu cu 4 conductoare pentru electromagnet si 1 cablu cu 4 conductoare de rezerva
Access control assembly consisting of 4 cables: 1 cable with 6 conductors for cards reader; 1 cable with 2 conductors for magnetic contact; 1 cable with 4 conductors for electromagnet and 1 cable with 4 conductors for spare

SIR1.F Sirena de interior, 105db, 105mA, cu flash
Indoor siren 105db, 105mA, with flash

SIR1.E Sirena de exterior, 105db, 105mA, cu flash
Outdoor siren 105db, 105mA, with flash

CC Cluster controller - unitate centrala de control acces,controlesca maxim 64 usi uni/bidirectionale , sau 32 bidirectionale,memorie 10.000 carduri si 100.000 evenimente ,interfata ETHERNET si RS485
Cluster controller-central access control unit, controls a maximum of 64 uni/bidirectional or 32 bidirectional doors, memory 10.000 cards and 100.000 events, ETHERNET and RS485 interface

CZ Centrala efractie cu 64 de zone
Burglary control panel with 64 zones

EXPANDER Expander cu 8 intrari si 8 iesiri conectat prin cablu de comunicatie RS 485 la centrala de efractie
Expander with 8 inputs and 8 outputs connected by RS-485 communication cable to the burglary control panel

Detector prezenta PIR
PIR presence detector

Tastatura pentru armare/dezarmare centrala efractie
Keyboard for arming/disarming burglary control panel

CATEGORIA DE IMPORTANTA	- A	(conf. H.G.R.NR.766-1997)
CLASA DE IMPORTANTA	- I	(conf. Normativ P100-06)
GRAD DE REZISTENTA LA FOC	- I - II	(conf. Normativ P118-1999)
RISC DE INCENDIU	- MIC	(conf. Normativ P118-1999)

VERIFICATOR / EXPERT	NUME	SEMNATURA	CERINTELE

TRACTEBEL ENGINEERING
Tractebel Engineering S.A.
Str. Antigeneral Constantin Budeanu nr. 10, Sector 1, 010771 Bucuresti, Romania
Tel.: +40 21 529 2000; Fax: +40 21 529 2020
Web: www.tractebel-engineering.com

ATELIER DE ARHITECTURA CHRISTIAN TANASCIUC

SPECIFICATE	NUME	SEMNATURA
SEF PROIECT	Arh.Christian TANASCIUC	
MANAGER PROIECT	Ing. Lilia POPA-BELEGANTE	
VERIFICAT	Ing. Aurelian NETA	
DESENAT	Ing. Florin Tanase	
PROIECTAT	Ing. Florin Tanase	

Scara 1:100
Format: A0+
Data: FEBRUARIE 2021

REFERAT de verificare/ RAPORT de expertiza tehnica
Nr. Data: -

Proiect: Intervenciones dezbilitar existente la construcile noua in incinta Spitalului Clinic Judetean de Urgente « Pius Brinzeu » din Timisoara, pentru asigurarea conformarii cladirii si modificarii pentru siguranta sporita(modificare UPU, Chirurgie, ATI si Centru de Mare Arsi.

Locatie: Bulevard Liviu Rebreanu 156, Timisoara 300723
Beneficiar: i Consiliul Judetean Timis
Investitor: i Ministerul Sanatatii - Romania

Denumire desen: Plan control acces si efractie parter
Ground floor burglary and access control plan

Pr. Nr: P-31/2045
Faza: PT+DE
Rev. 01
Pagina V1
Nr. desen: P-31/2045_DE_BC-01